Unity Entrance Lock

Exterior   Interior
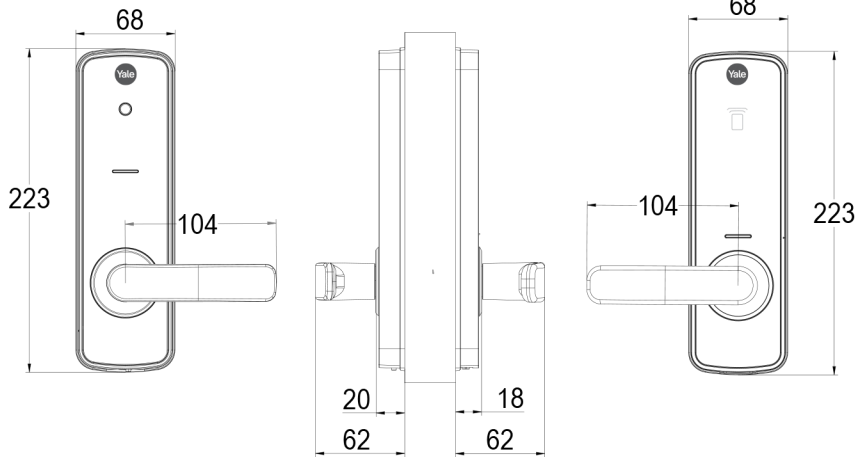
Features & Specifications

- Digital deadlocking
- Certified to SL8 (Security) & to D8 (Durability) Australian Lock Standard (AS4145.2:2008)
- Certified to BAL-40 Bushfire Level (AS1530.8.1-2007)
- Fits standard doors 35mm- 60mm thick
- 60-70mm backset latch compatible
- Total control via App
- Auto unlock
- Tailor user access
- Lock alert
- 24/7 Lock Activity trails
- Door Position Sensor
- 100% keyfree

Finishes

● Silver   ● Matt Black

Display Pack

Description	Part Number
Yale Unity Entrance Lock	**Silver:** YUR/DEL/1/SIL **Matt Black:** YUR/DEL/1/MBK

Trade Packs

Yale Unity Entrance Lock with Connect Plus Wi-Fi Bridge	**Silver:** YUR/DEL/PBDG/SIL **Matt Black:** YUR/DEL/PBDG/MBK
Yale Unity Entrance Lock Silver with Smart Keypad	YUR/DEL/KP/SIL
Yale Unity Entrance Lock with Connect Plus Wi-Fi Bridge and Smart Keypad	**Silver:** YUR/DEL/PKIT/SIL **Matt Black:** YUR/DEL/PKIT/MBK
Yale Contactless Key Tag	YDKEYTAG
Yale Unity Installation Template	YUR/TEMPLATE
Yale Unity Nexion Retrofit Kit	YUR/NX/KIT
Yale 530 Series Tubular Deadlatch 70mm Backset Satin Chrome	Y530-222SC

Technical Specifications

Australian Standard	AS4145.2.2008, SL8 Security, D8 Durability, AS1530.8.1-2007 and BAL-40 Bush Fire Level
Compliance	Regulatory Compliance Mark (RCM) for Australia and New Zealand
Lock Type	530 Latch
Door Thickness	35-60mm
Backset	60-70mm backset (70mm latch sold separately – Y530-222SC)
Finish	Silver/Matt Black powdercoat with black nylon
RFID	2 x Contactless Key Tags
Power	4 x AA Alkaline batteries
Battery Life on lock	approximately 12 months
Low Battery Warning	20%
Volume Settings	Off, Low, High
Operating Temperature	-25-70°C
Humidity	0-95%
IP Rating	IP54
Use	Entry doors. Not for use on doors where the internal escutcheon is exposed to outside elements. Eg: Outdoor gate

Unity Entrance Lock Fire Rated

Features and Specifications

- Successfully tested for 2 hours on fire door assemblies in accordance with Australian Standard AS1905.1-2015 fire-resistant door sets

- Secure Mode disabled for fire door applications

- Ready to install out of the box. No need to install an additional fire kit to the door or make any adjustments to the Unity Entrance Lock door preparation

Trade Packs

Description	Part Number
Yale Unity Entrance Lock Fire Rated Silver	YUR/DEL/FR/SIL
Yale Unity Entrance Lock Fire Rated Silver + Connect Plus Wi-Fi Bridge	YUR/DEL/FR/PBDG/SIL
Yale Unity Entrance Lock Fire Rated Silver with Smart Keypad	YUR/DEL/FR/KP/SIL
Yale Unity Entrance Lock Fire Rated Silver + Connect Plus Wi-Fi Bridge + Smart Keypad	YUR/DEL/FR/PKIT/SIL
Yale Contactless Key Tag	YDKEYTAG
Yale 530 Series Tubular Deadlatch 70mm Backset Satin Chrome	Y530-222SC

NOTE: The Yale Unity Installation template and Yale Unity door sensor and magnet are also compatible with Unity Entrance Lock Fire Rated.

Technical Specifications	
Australian Standard	AS4145.2.2008, SL8 Security, D8 Durability, AS1530.8.1 2018 BAL-40 Bush Fire Level, AS1905.1.2015, Fire Resistant Door sets