

FDMS-TP



Aluminium meeting stile seal set for proprietary single action fire door assemblies. Designed specifically for high performance smoke and sound containment for pairs of nom. 47mm fire doors.

Key Features

- New modern and aesthetic appearance.
- Incorporates intumescent fire and smoke sealing technology.
- Improves acoustic performance.
- Can be used to upgrade existing fire doors.
- Easy installation.
- Sold as complete assembly, including a T-Bar and plain aluminium section with intumescent strips and flexible silicone smoke seal.

Materials

Anodised aluminium astragals with integral high performance intumescent fire seals plus flame retardant silicone smoke and acoustic seal fitted to 'T' section.

Standard lengths

2135mm, 2440mm, 3050mm, 3500mm

Finish



Clear anodised finish with grey silicone seal insert.

Fixing

The Kilargo FDMS-T astragals come complete with the intumescent and silicone seal fitted. Simply cut to length and screw-fix to the respective door leaves.

Approval/s

- AS1530/4 fire tests with proprietary fire door assemblies.
- Medium temperature smoke leakage approvals to AS1530 Part 7 available on proprietary door assemblies
- Conforms with BCA Specification C3.4 smoke sealing requirements
- Acoustically tested in accordance with AS1191, ISO140.3 & ISO10140-2.

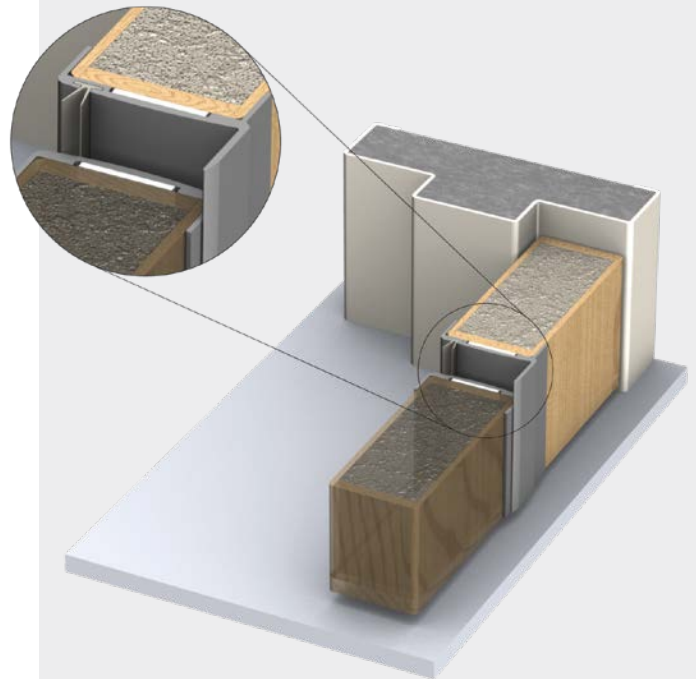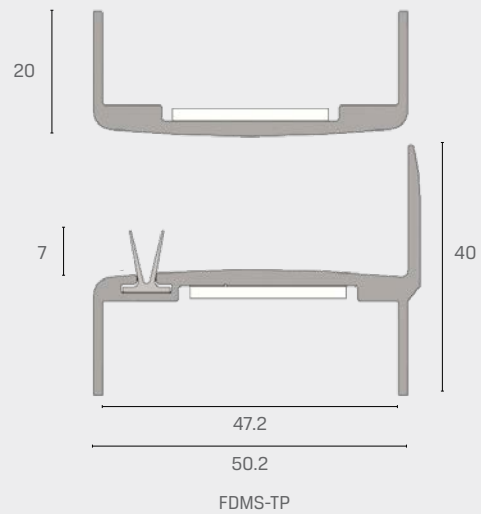

Kilargo FDMS-TP | Last edit 21/11/2019

15 Wentworth Pl, Banyo QLD 4014, Australia
P +61 7 3635 5000 F +61 7 3861 9266 E sales@kilargo.com.au W kilargo.com.au

