

IS3015si, IS3016si, IS3017si



The IS3015si and IS3016si seals are cleverly concealed in a rebated groove in the meeting stile or bottom of the door leaf (respectively) for single and double swing timber doors. These seals may be surface mounted or rebated into doors to allow for depth adjustment as required. Both seals can provide effective containment against medium and ambient temperature smoke, sound, dust, light, weather and vermin.

The IS3017si is a sweep action blade seal with high performance silicone rubber fins, which can be fitted to door bottoms or perimeters of single and double action doors. This seal may be surface mounted or rebated into doors to allow for depth adjustment as required. This seal provides effective containment against dust, light, weather and vermin, and is an ideal smoke seal for pivot door assemblies.

Gap size

- IS3015si: Min. 3mm / max. 8mm
- IS3016si: Min. 5mm / max. 9mm (allowing for the aluminium carrier to be recessed).
- IS3017si: Min. 8mm / max. 12mm

Standard lengths

- 1000mm
- 2250mm
- Also available in: 250mm increments from 1000mm to 5000mm

Standard colours



- IS3015si and IS3016si: Silver anodised aluminium with grey silicone gasket (Black silicone gaskets also available upon request)
- IS3017si: Silver anodised aluminium section with grey silicone fins (Black silicone fins also available upon request)

Fixing


- Timber fixing screws are supplied with detailed fitting instructions
- Fixing holes are pre-drilled and slotted to allow the seals to be positioned accurately

Approval/s


- Conforms with BCA Specification C3.4 smoke sealing requirements
- Acoustically tested in accordance with AS1191, ISO140.3 and ISO10140-2

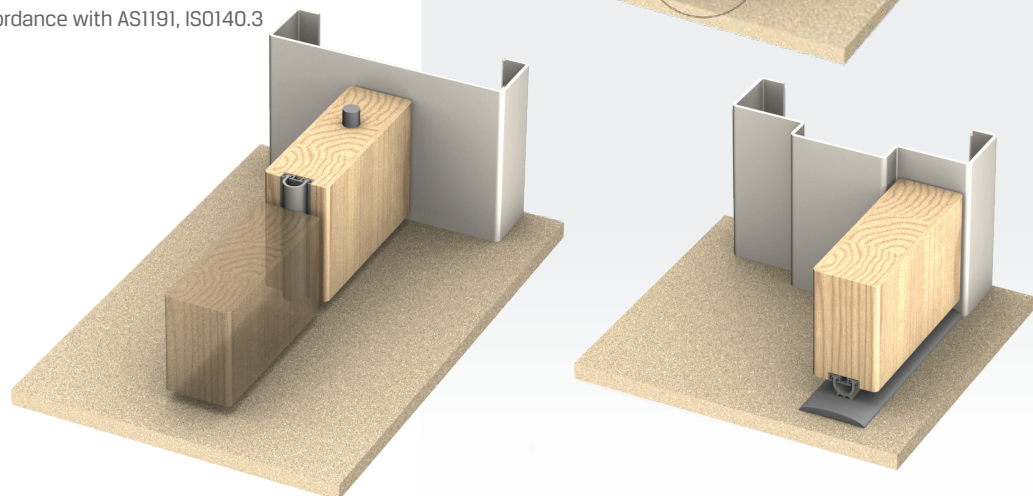

IS3015si



IS3016si



IS3017si